
COBRA

ATTACHMENT FOR SCREENING AND CRUSHING

Cobra



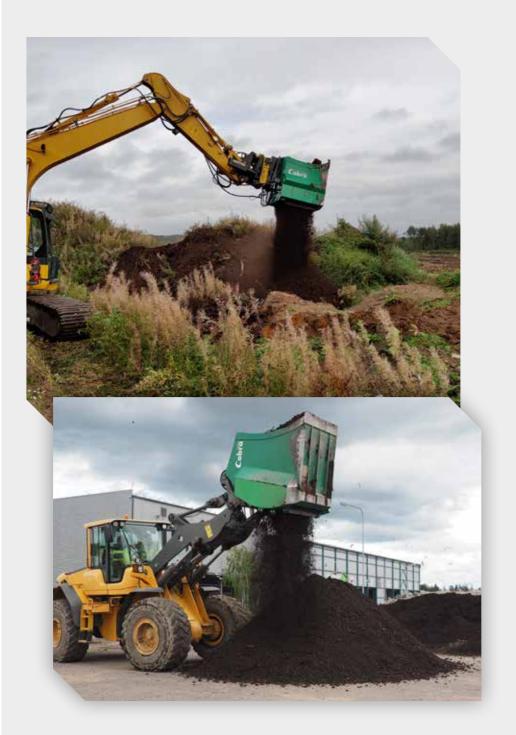

COBRA SCREENING BUCKET

With Cobra Screening Bucket you can effectively screen, crush, separate, sort, recycle, re-use, mix, backfill and/or aerate many different materials like soil, dirt, peat, mulch, waste soil, demolition waste, industrial by-products, frozen materials, etc. You can process also wet materials.

Cobra Screening Buckets are designed to be used with excavators, wheel loaders, backhoes, telehandlers and skid steers. Thanks to robust design and fine adjustment of fragment size it's a versatile and powerful tool to ensure high quality end product and high production rate.

Cobra Buckets are light but high with volume of the bucket. You can manoeuvre Cobra Bucket with smaller base machines and save also remarkably in investment costs.

COBRA APPLICATIONS

Cobra Screening Bucket is a perfect solution for material handling when capacity and fragment size matters. It's a light attachment with high screening capacity and adjustable fragment size. Same attachment can be used for many applications. Skip wasting material and money for transports, instead process, re-use or recycle on site with Cobra for profit.

APPLICATIONS

- » SCREENING AND SORTING MATERIALS FOR RECYCLING
- » COMPOSTING, AERATING GREEN WASTE
- » RECYCLING AND PROCESSING OF TOPSOIL AND DIRT
- » RECYCLING DEMOLITION WASTE
- » PIPELINE AND CABLE TRENCH PADDING AND BACKFILLING

- » PREPARING TOPSOIL FOR LANDSCAPING
- » SCREENING PEAT AND MULCH
- » MIXING OR STABILIZING DIFFERENT MATERIALS
- » CRUSHING, SCREENING AND GRINDING OF RAW MATERIALS IN INDUSTRIAL APPLICATIONS
- » CRUSHING AND SCREENING FROZEN
 MATERIALS, LIKE SAND OR FERTILISERS











COBRA XS -SERIES



3 - 13 TON



1,5 -7 TON

Cobra XS -Series Screening Bucket is specially designed to work with 3 - 13 ton excavators and/or 1,5 - 7 ton wheel loaders, backhoes, skid steers and telehandlers. Cobra XS -Series can be installed also with a tilt-rotator and quick coupler.

With Cobra XS -Series Bucket you can effectively screen, crush, separate, sort, recycle, re-use, mix, backfill and/or aerate many different materials like soil, dirt, peat, waste soil, demolition waste, industrial by-products, frozen materials, etc. You can process also wet materials.



COBRAS - SERIES



10 - 26 TON



€ 5 - 15 TON

Cobra S -Series Screening Bucket is designed to work with 10-26 ton excavators and/or 5-15 ton wheel loaders, backhoes and telehandlers. Thanks to robust design and fine adjustment of fragment size it's a versatile and powerful tool to ensure high quality end product and high production rate.

With Cobra S -Series Buckets you can effectively screen, crush, separate, sort, recycle, re-use, mix, backfill and/or aerate many different materials like soil, dirt, peat, waste soil, demolition waste, industrial by-products, frozen materials, etc. You can process also wet materials.





COBRA L -SERIES



16 - 50 TON



8 - 30 TON

Cobra L -Series Screening Bucket is designed to work with 16-50 ton excavators and/or 8-30 ton wheel loaders. In spite of light weight, it has a robust design with single or double power transmission and high inner volume of the bucket. It has also fine adjustment of fragment size. Thanks to all its innovative technical features, it's a versatile and powerful tool to ensure high quality end product and high production rate.

With Cobra L -Series Bucket you can effectively screen, crush, separate, sort, recycle, re-use, mix, backfill and/or aerate many different materials like soil, dirt, peat, waste soil, demolition waste, industrial by-products, frozen materials, etc. You can process also wet materials.

COBRA P -SERIES




18 - 40 TON



10 - 30 TON

Cobra P -Series Screening Bucket is special designed for heavy applications like pipeline padding and back filling as well as communal piping or any other job where strength and durability are required. It works with 18-40 ton excavators and/or 10-30 ton wheel loaders. It has a robust design with single or double power transmission and high inner volume of the bucket. It has also fine adjustment of fragment size. Thanks to all its innovative technical features, it's a versatile and powerful tool to ensure high quality end product and high production rate.

With Cobra P -Series Bucket you can effectively screen, crush, separate, sort, recycle, re-use, mix, backfill and/or aerate many different materials like soil, dirt, peat, waste soil, demolition waste, industrial by-products, frozen materials, etc. You can process also wet materials.

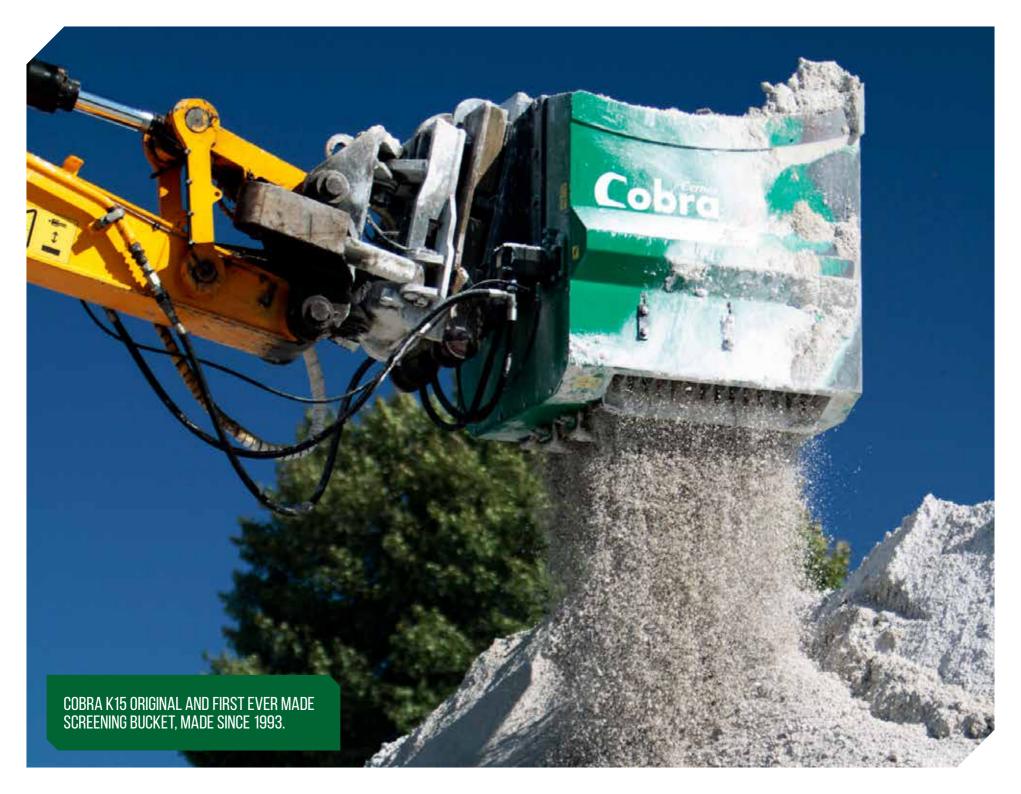



COBRAK-SERIES



16 - 30 TON

THE ORIGINAL SCREENING BUCKET

The first Cobra K -Series Bucket was developed and made already in 1993 and is still in use. Cobra K -Bucket has high production capacity and robust design with double power transmission for long term use. Product development is based on years of experience.


Cobra K -Series Screening Bucket is designed to work with 16 - 30 ton excavators, backhoes and telehandlers.



COBRA OPTIONS


- » HD STRENGTHENING FOR BOTTOM AND SIDE PLATES (EXCL. K -SERIES)
- » XHD STRENGTHENING FOR THE FRAME (L -SERIES ONLY)
- » ADDITIONAL INTERCHANGEABLE CUTTING EDGE
- » LEVELLING PLATE
- » EXTRA SIDES FOR LIGHTER MATERIALS
- » SINGLE OR TWIN POWER TRANSMISSION (EXCL. XS2-60 AND XS2-90)
- » HYDRAULIC MOTORS WITHOUT DRAIN LINE
- » INTELLIGENT POWER CONTROL VALVE AND DRAIN OIL ELIMINATOR
- » DRUMS/DISCS FOR OTHER FRAGMENT SIZES

COBRA DRUM/DISC ALTERNATIVES



S-MODEL

THICKNESS: 8*,10,16 OR (25**) MM FRAGMENT SIZES 10-50(65**) MM Standard disc for high quality screening



C-MODEL

THICKNESS: 8*,10,16 OR (25**) MM FRAGMENT SIZES 10-50(65**) MM Special design for crushing and/or screening



CH -MODEL**

HAMMERS: 25 X 60 MM FRAGMENT SIZES: APPROX. 65MM

Special design for mixing, aerating or crushing soft materials






X -MODEL

FRAGMENT SIZES: APPROX. 50 OR 75MM

Special design for crushing,
separating, mixing or aerating, also
for sticky and wet materials




Q-MODEL

FRAGMENT SIZES: 10-50 (65**) MM

Special design for screening stony materials.


THICKNESS: 8*.10.16 OR (25**) MM



K-MODEL

THICKNESS: 8*,10,16 OR (25**) MM Fragment Sizes: 10-50 (65**) MM

Special design for soft crushing and/or screening; Ideal for sticky or frozen material.

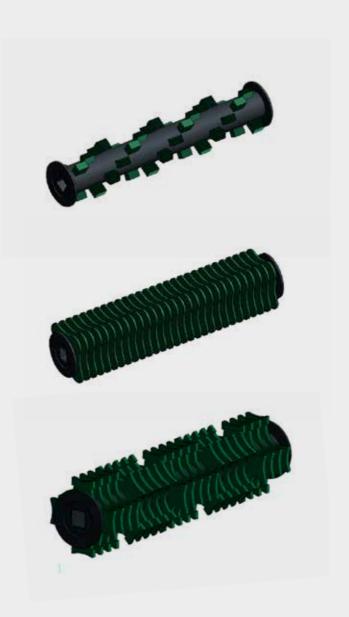

TECHNICAL SPECIFICATION



| Model | | | ecommer n weight (| | Fragment sizes mm Screening, crushing, separating, mixing | Hydraulic settings | | | | | | | |
|-----------|--------|------------------|-----------------------|-------------------|--|---|-------------------------------|--------------------|-----------------|--------------------------|----------------------|-------------------------|-----------|
| | | vators 2 t/m³ | | loaders 2 t/m³ | | Recommended hydraulic flow I/min (min-max) (120-150 rpm) | Max. input power cont/peak kW | Hydraulic motor | Volume water | Volume heap SAE m³ | Screen area m² | Measures (L x W x H) | Approx. |
| XS models | 1 (/m² | Z (/III° | 1 (/m² | 2 (/1113 | pulverising, separating | (120-150 rpm) | cont/peak kw | type | ISO m | SAE III° | m² | cm | weight kg |
| XS 2-60 | 3,0 | 4,5 | 1,5 | 2,0 | 10,15, 20, 25, 30, 35, 40 | 30 - 45 | 15/30 | 1 x Gerotor | 0,2 | 0,2 | 0,3 | 850 x 770 x 830 | 280 |
| XS 2-90 | 5,0 | 7,0 | 2,0 | 3,0 | 10,15, 20, 25, 30, 35, 40, 50, 75 | 30 - 45 | 15/30 | 1 x Gerotor | 0,3 | 0,3 | 0,4 | 1150 x 770 x 830 | 380 |
| XS 2-120 | 7,0 | 9,0 | 3,0 | 4,0 | 10,15, 20, 25, 30, 35, 40, 50, 75 | 45 - 80 | 37,5/60 | 1 x Gerotor | 0,5 | 0,6 | 0,6 | 1450 x 770 x 830 | 570 |
| XS 2-150 | 9,0 | 11,0 | 4,0 | 5,0 | 10,15, 20, 25, 30, 35, 40, 50, 75 | 45 - 80 | 37,5/60 | 1 x Gerotor | 0,8 | 0,9 | 0,8 | 1750 x 770 x 830 | 660 |
| S models | | | | | | | | | | | | | |
| S 2-120 | 10,0 | 12,0 | 4,0 | 5,0 | 10, 15, 20, 25, 30, 35, 40, 50, 75 | 60 - 90 | 33/52 | 1 x Gerotor | 0,7 | 0,8 | 0,6 | 1570 x 1020 x 1135 | 840 |
| S 2-150 | 12,0 | 14,0 | 6,0 | 8,0 | 10, 15, 20, 25, 30, 35, 40, 50, 75 | 60 - 90 | 33/52 | 1 x Gerotor | 0,9 | 1,0 | 0,8 | 1870 x 1020 x 1135 | 980 |
| S 3-90 | 10,0 | 12,0 | 5,0 | 7,0 | 10, 15, 20, 25, 30, 35, 40, 50, 75 | 60 - 90 | 33/52 | 1 x Gerotor0 | 0,7 | 0,8 | 0,6 | 1270 x 1165 x 1210 | 880 |
| S 3-120 | 12,0 | 15,0 | 6,5 | 9,0 | 10, 15, 20, 25, 30, 35, 40, 50, 75 | 75 - 115 | 33/52 | 1 x Gerotor | 0,9 | 1,0 | 0,8 | 1570 x 1165 x 1210 | 1050 |
| S 3-150 | 14,0 | 18,0 | 7,5 | 11,0 | 10, 15, 20, 25, 30, 35, 40, 50, 75 | 75 - 115 | 33/52 | 1 x Gerotor | 1,1 | 1,2 | 1,0 | 1870 x 1165 x 1210 | 1260 |
| S 3-180 | 16,0 | 22,0 | 9,0 | 13,0 | 10, 15, 20, 25, 30, 35, 40, 50, 75 | 75 - 115 | 33/52 | 1 x Gerotor | 1,3 | 1,4 | 1,3 | 2170 x 1165 x 1210 | 1480 |
| L models | | | | | | | | | | | | | |
| L3-120 | 16,0 | 20,0 | 8,0 | 11,0 | 10, 15, 20, 25, 30, 35, 40, 50, 65, 75 | 90 - 140 | 48/56 | 1 x Gerotor | 1,5 | 1,7 | 1,0 | 1846 x 1632 x 1492 | 1550 |
| L3-180 | 20,0 | 24,0 | 10,0 | 13,0 | 10, 15, 20, 25, 30, 35, 40, 50, 65, 75 | 90 - 140 | 48/56 | 1 x Gerotor | 2,2 | 2,4 | 1,5 | 2310 x 1632 x 1492 | 2000 |
| L3-240 | 26,0 | 30,0 | 12,0 | 14,0 | 10, 15, 20, 25, 30, 35, 40, 50, 65, 75 | 180 - 280 | 120/180 | 2 x Gerotor | 3,2 | 3,5 | 1,8 | 2910 x 1632 x 1492 | 2700 |
| L 4-120 | 22,0 | 25,0 | 10,0 | 13,0 | 10, 15, 20, 25, 30, 35, 40, 50, 65, 75 | 95 - 140 | 60/90 | 2 x Rad.piston | 1,9 | 2,1 | 1,2 | 1710 x 1890 x 1800 | 1980 |
| L 4-180 | 26,0 | 30,0 | 12,0 | 16,0 | 10, 15, 20, 25, 30, 35, 40, 50, 65, 75 | 95 - 140 | 60/90 | 2 x Rad.piston | 3,0 | 3,2 | 1,8 | 2310 x 1890 x 1800 | 2600 |
| L 4-240 | 32,0 | 38,0 | 14,0 | 18,0 | 10, 15, 20, 25, 30, 35, 40, 50, 65, 75 | 110 - 170 | 60/90 | 2 x Rad.piston | 4,1 | 4,4 | 2,4 | 2910 x 1890 x 1800 | 3400 |
| P models | | | | | | | | | | | | | |
| P3-120 | 18,0 | 22,0 | 8,0 | 11,0 | 10, 15, 20, 25, 30, 35, 40, 50, 65, 75 | 90 - 140 | 48/56 | 1 x Gerotor | 1,3 | 1,5 | 1,0 | 1652 x 1813 x 1495 | 1580 |
| P3-180 | 22,0 | 26,0 | 10,0 | 13,0 | 10, 15, 20, 25, 30, 35, 40, 50, 65, 75 | 180 - 280 | 120/180 | 2 x Gerotor | 1,9 | 2,2 | 1,5 | 2252 x 1813 x 1495 | 2000 |
| P3-240 | 28,0 | 32,0 | 12,0 | 15,0 | 10, 15, 20, 25, 30, 35, 40, 50, 65, 75 | 180 - 280 | 120/180 | 2 x Gerotor | 3,0 | 3,3 | 1,8 | 2852 x 1813 x 1495 | 2850 |
| P4-180 | 28,0 | 32,0 | 12,0 | 15,0 | 10, 15, 20, 25, 30, 35, 40, 50, 65, 75 | 180 - 280 | 120/180 | 2 x Gerotor | 3,0 | 3,0 | 1,8 | 2310 x 1900 x 1800 | 2950 |
| K models | | | | | | | | | | | | | |
| K-15 | 16,0 | 20,0 | - | - | 10,15, 20, 25, 30, 35, 40, 50, 65, 75 | 120 - 180 | 75 / 120 | 2 x Gerotor | 1,0 | 1,1 | 0,9 | 1350 x 1200 x 1440 | 1490 |
| K-120 | 20,0 | 25,0 | - | | 10,15, 20, 25, 30, 35, 40, 50, 65, 75 | 120 - 180 | 75 / 120 | 2 x Gerotor | 1,4 | 1,5 | 1,2 | 1350 x 1200 x 1740 | 1770 |

CERNOS IN BRIEF

Cernos Oy (Ltd) is a Finland based private company producing attachment type Screening Buckets under Cobra trade name for screening and crushing applications. First Cobra Buckets have been developed and produced already over 25 years ago.

Since then the Cobra Buckets have been widely tested and approved in several applications like soil and peat screening, pipeline and cable trench padding and backfilling, recycling of wastes, processing industrial by products, etc.

All during the years we have listened to the feedback and needs of our customers and developed our products accordingly. That's why Cobra Buckets are today highly appreciated for working reliably and effectively even in most demanding circumstances as well as Cobra customer service to be the best on the market.

We at Cernos are dedicated to find new solutions for improving working methods, processes and equipment together with our partners. We'll be worth of your trust!

Cernos

Cernos Oy (Ltd) Ähtärintie 41, 63700 Ähtäri, Finland Moukarikatu 2, 15700 Lahti, Finland +358 44 358 3112 info@cernos.fi www.cernos.fi





888-280-1710 sales@ransomeattach.com www.ransomeattach.com