



MINI FOREST



MINI FOREST RANGE
NO COMPROMISE



45 years of manufacturing quality ... guaranteed




Technical

Model	Excavator Weight Range (Tons)	Mulcher Weight w/o Bracket (lbs)	Oil Flow Requirement (gal/min)	Max Hyd Circuit Pressure (psi)	Cut Width (Inches)	Max Cut Diameter (Inches)	Rotor Type	Standard Motor Size (cc)	Total Width (Inches)
MF50L	2-3	485	6.6 - 9.2	2755-2900	19.6	4	Fixed tool rotor	14	32
MF70L	2.5-5	628	6.5	3190-3625	28	6	Fixed tool rotor	17	35
MF90L	4-6	738	9.8	3190-3625	35	6	Fixed tool rotor	17	43
MF80L-C/Q	5-10	1157	10.9-16.4	3190-3625	32	8	Fixed tool rotor	34	40
MF100L-C/Q	5-14	1267	13-24	3190-3625	40	8	Fixed tool rotor	34	47

MF100L-C/Q



MF70L

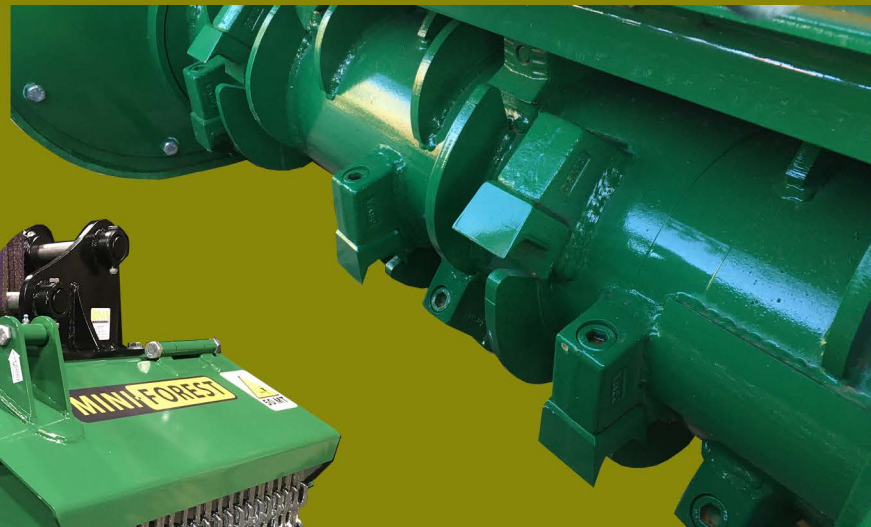

AT A GLANCE

- 'Depth Control Rotor (DCR) for maximum efficiency'
- To suit excavators from 2.5 to 14 tons (std configuration). Also available for compact loader & skid steer applications.
- Cut capability for grass and vegetation up to 8 inches diameter.
- Heavy duty casing manufactured from Weldox 700 steel for maximum strength and durability.
- Internal frame and counter blades manufactured from Hardox 400.
- Piston motor gives optimum power output.
- Multi-belt transmission.
- Hydraulic operation of front cover.
- Variable displacement motor option.
- 45 years of manufacturing quality.... guaranteed.



MF100L-C/Q

US Partner / Distributor



Address:
106 Ark Road
Lumberton, NJ 08048

Phone: 888-280-1710
Email: sales@ransomeattach.com

MINI FOREST

No Compromise

MINI FOREST

- Vegetation Control.
- Site Clearance.
- Thinning Operations.
- Embankment Maintenance.
- Whole Trees, Scrub, Grass.
- Boundary Restoration.
- Woodland Maintenance.



Exac-One Ltd
The Mount Buildings
Tunnel Hill
Upton on Severn
Worcestershire
WR8 0QL
UK

+44 (0)1684 593052

www.exac-one.co.uk
info@exac-one.co.uk